
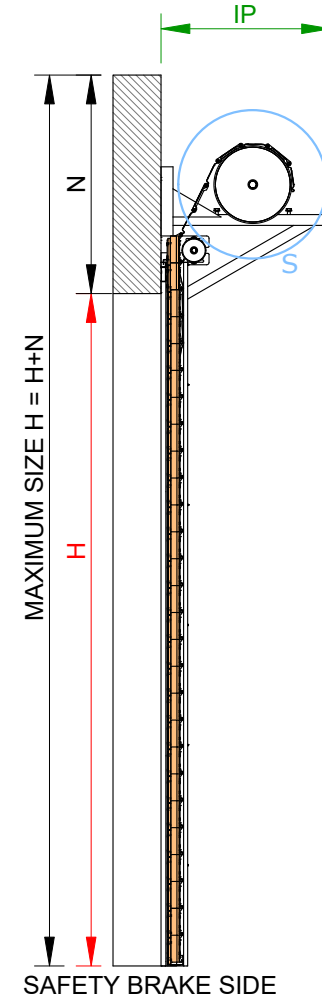
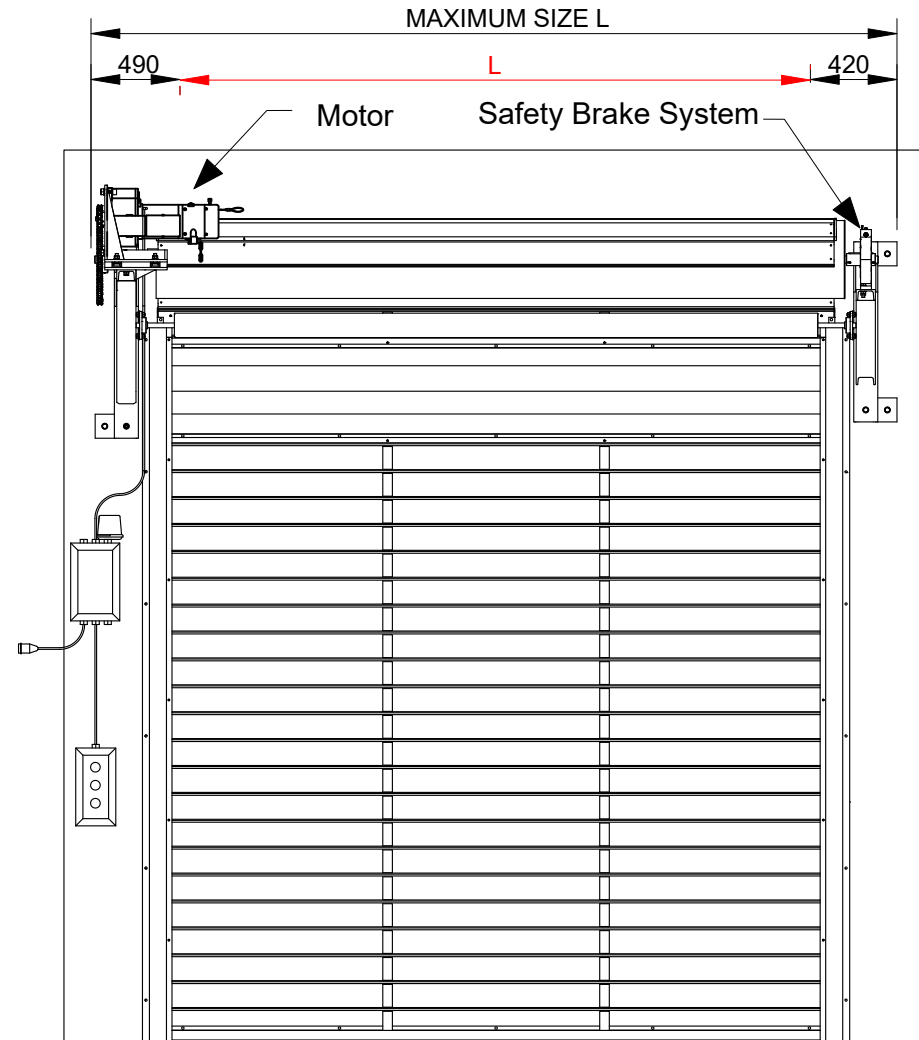


THE CUSTOMER MUST VERIFY THAT THE STRUCTURAL CHARACTERISTICS OF THE SUPPORT ARE SUITABLE FOR INSTALLING THE DAMPER. IT IS POSSIBLE TO FIX IT ON A PROTECTED STRUCTURAL STEEL SUPPORT DIMENSIONED IN ACCORDANCE WITH THE EN15269-10:2011 STANDARD.

THE BRACKETS IN THIS DRAWING
ARE INDICATIVE AND NOT
BINDING, REFER TO THE
DIMENSIONAL TABLES AND ASK
FOR CONFIRMATION FROM THE
CONEGLIANO GROUP SRL
TECHNICAL OFFICE


OVERALL DIMENSIONS "N", "IM",
"IP", "S": REFER TO THE
DIMENSIONAL TABLES

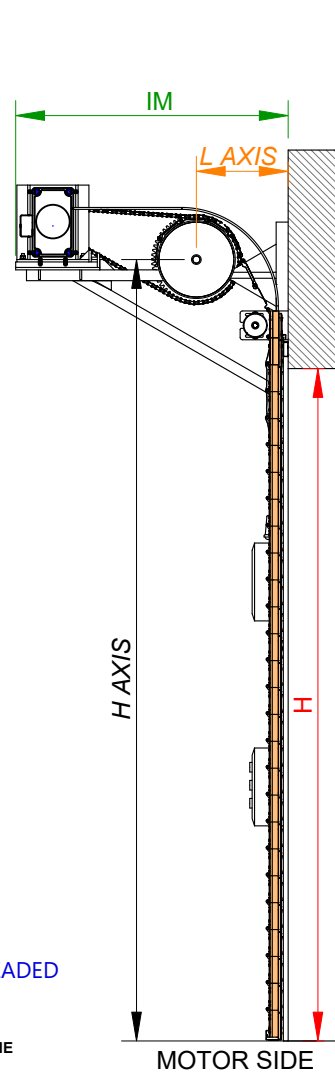


SHELVES:
FIXING THROUGH 12mm THREADED
ROD WITH REAR PLATE

THE FIXINGS MUST BE SUITABLE FOR THE
MATERIAL OF THE LAYING SURFACE:

MINIMAL FEATURES

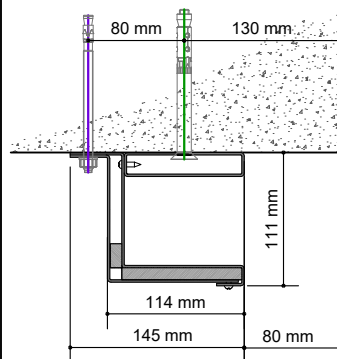

NOTE ON GUIDES:
OVER 7m OF HOLE WIDTH THE DEPTH OF
THE GUIDES INCREASES BY 20mm EACH

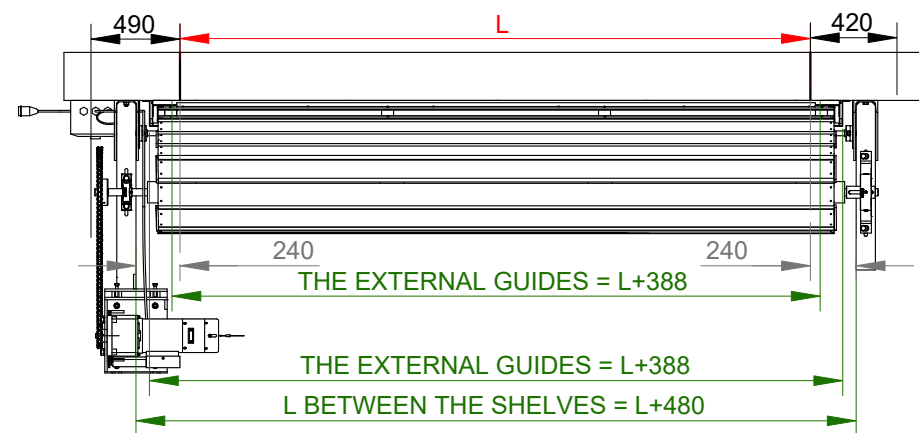

THE EXTERNAL GUIDES = L+388

THE EXTERNAL GUIDES = L+388

L BETWEEN THE SHELVES = L+480

DATE 01/03/2023

Revision/Note:

DIS: V.F.

APP: L.B.

FILE: EI60

DAN-doors
INTELLIGENT SOLUTIONS

BLOCKSHUTTER EI60